

# ISTANBUL OVAL BATHTUB *by Covegrove.* 190x90cm

VitrA®

Size (cm) : 190x90

Height (cm) : 55.5

Depth (cm) : 42


Weight (kg) : 36

Volume (lt) : 255


Available massage systems: Duo Maxi  
Duo Soft  
Aqua Maxi  
Aqua Soft

## Compatible Istanbul Serie


Faucets with this product : 41819 Joystick free standing bath / shower  
mixer with handshower  
41811 Bath / Shower mixer  
41813 Bath / Shower mixer

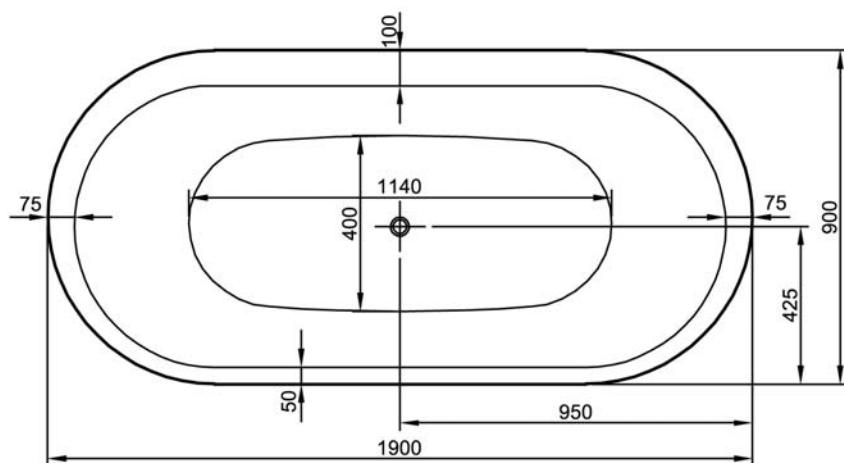

Plan

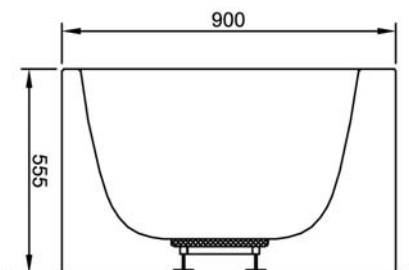

Side View

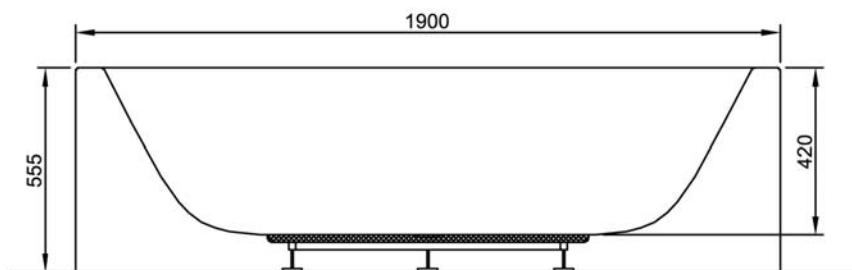


Front View


### Points to Notice:

- An elbow and a waste connection hose of 50 mm. will be delivered with the product but an edge lath and other accessories are not included.
- The place where the product will be installed should be straight.
- The electrical system is running with 220 volt (with earth connection). For its connection a 3x2,5 mm. cable should be used.
- The product should be protected with an appropriate ampere fuse (for Duo Maxi System 20 ampere, for Duo Soft System 16 ampere, for Aqua Maxi and Aqua Soft Systems 10 ampere) and the amper fuse should be closed when it is not used.
- The faucet applications should be from the points shown in the drawings below which are indicated with stickers on the product.
- Handgrip application for this product is not available.
- The bathtub must be carried in the upside down position. Do not lift or support the bathtub by the panels.
- During the infrastructure installation of the product, the bathtub should be turned to its side in order to prevent the whole weight to be on the monobloc panels.
- For the cleaning of the acrylic bathtub look at the User Manual.
- Waste connection fuse, wall hangers and user manual are delivered with the product.


## Faucet Applications

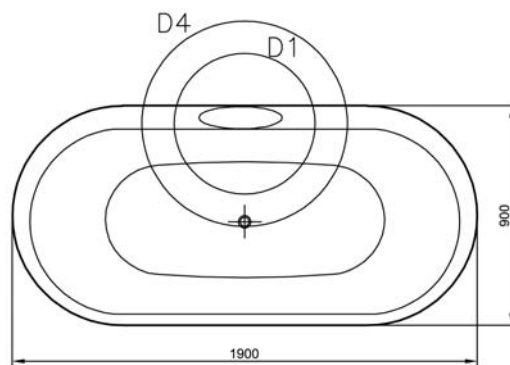


*Faucet Application Places*

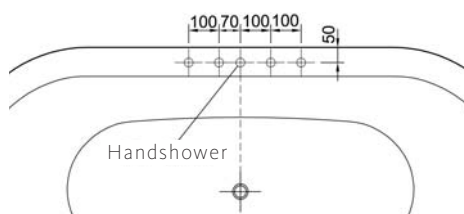

*Bath Filler 5 Holes*

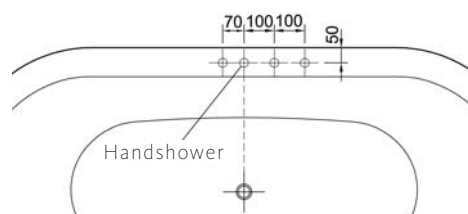


*Bath Filler 4 Holes*

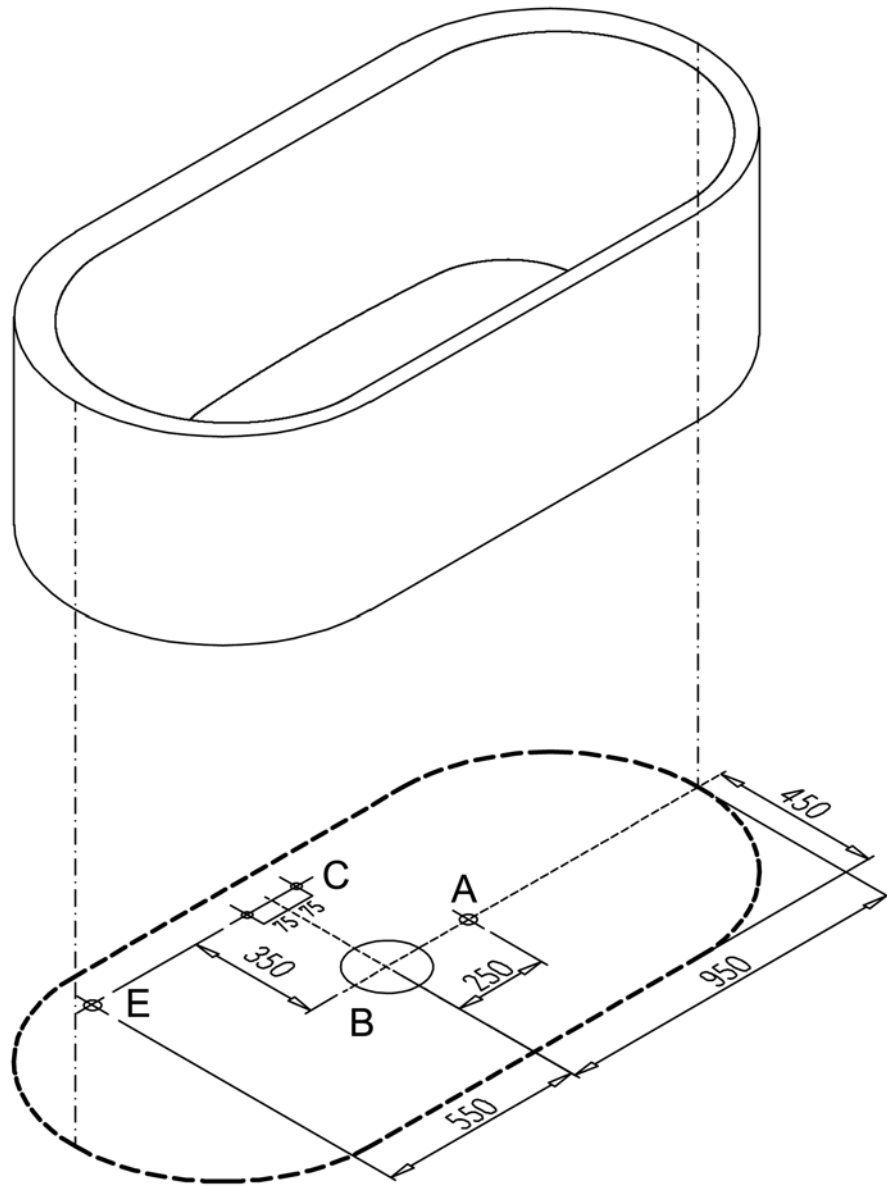


- A** : Ideal position of the waste outlet (ø 50 mm). The end point of the waste outlet should not be cut out, and should be left at least 50 mm. above the surface.
- B** : The area where the waste outlet should be avoided.
- C** : Hot & cold water inlet for the wall taps.
- E** : Measures for electrical connection of whirlpool tubs.


# Massage Systems

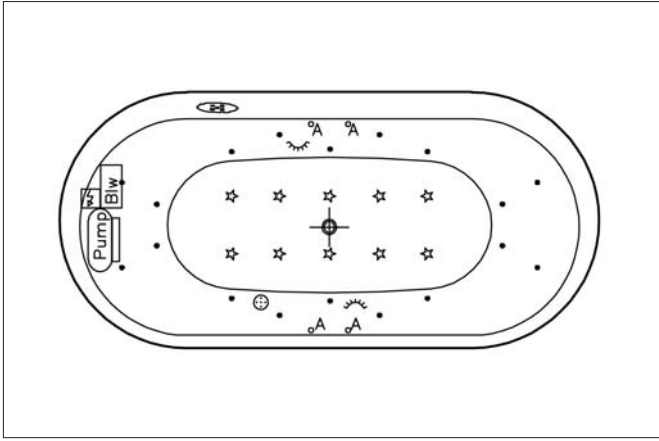


Duo Maxi

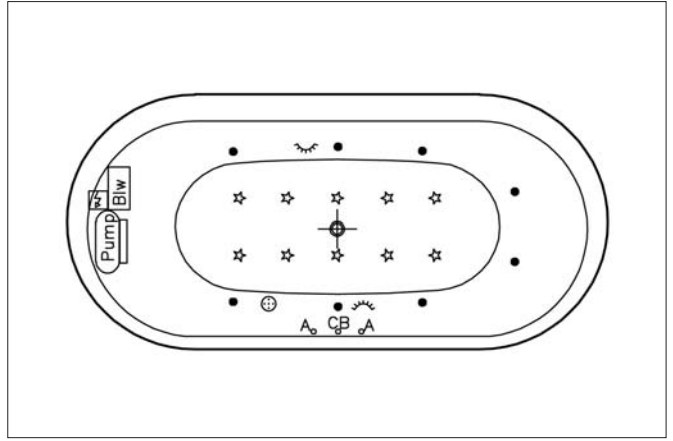

Duo Soft

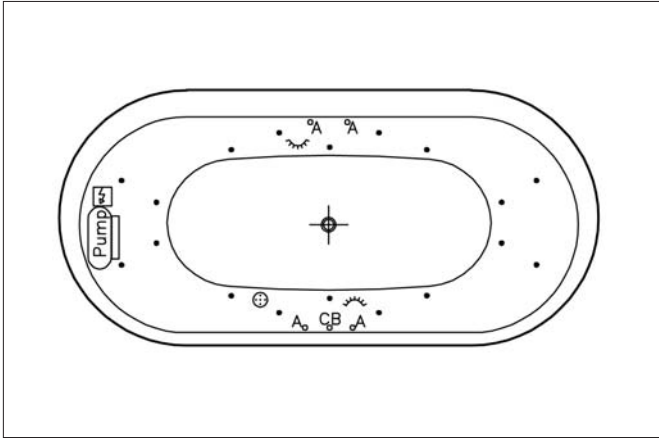

Aqua Maxi

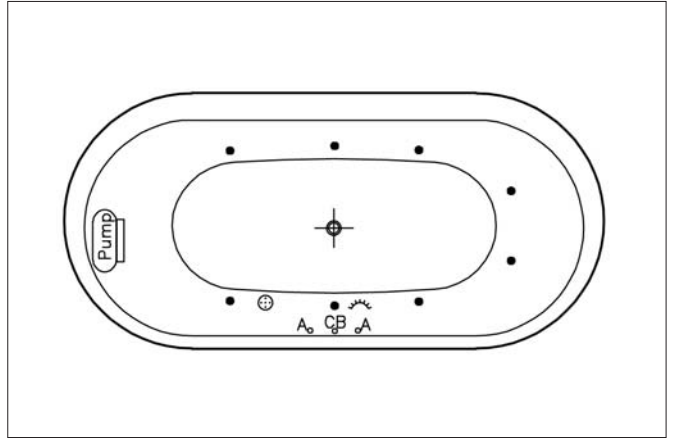

Aqua Soft

	Pump
	Electronic Control Panel
	Transformer
	Blower
	Control Button
	Air Controller

	Air Jets
	Waste
	Water Jets
	Micro Water Jets
	Underwater Light
	Water Suction Filter

## IMPORTANT!

- For the electrical connection of the hydromassage bathtubs, earth connection is necessary.
- The cable connection of the hydromassage bathtubs should be applied as shown in the Figure.
- Check whether the yellow-green earth cables bound with the metal parts placed under the hydromassage bathtubs are connected to all legs.

