

Diplomat

Reflections



M-Drive



LiquidFX



SportZone Seat



UltraPure



UltraLounge



NeckFlex Pillow

Shell Colors



UltraLife Jasper Obsidian Opal Graphite



Tanzanite Moonstone Sunstone Sand

Architectural Trim

ENVIROTECT



Tan Brown Gray



Oak Cherry Cattails

Specifications

Dimensions **92" W x 92" H x 36" H**

Seating **5**

Jets **48 jets**

Electrical **240V, 30/40/50A**

NeckFlex Jet Pillows **3**

Water Management **UltraPure**

Full-Foam Insulation **Standard**

Liquid FX **Optional**

Stereo **Optional**

Features



Pumps



Persons



Jets



NeckFlex Jet Pillows



UltraLounge



UltraPure



M-Drive



Liquid FX (Optional)



DIMENSION ONE SPAS®

www.d1spas.com

General	
Shape	Square
Seating Capacity	5
Shell Material	Ultralife™ / Granitex™ / Geloy®
Dimensions	92" x 92" x 35½" H / (234cm X 234cm x 90cm H)
Corner Radii	16" (41 cm)
Water Capacity	330 Gallons (1250 Liters)
Dry Weight	900 lbs (408 kg)
Shipping Weight	Domestic 900 lbs (408 kg) - Export 950 lbs (431 kg)
Full Weight	3650 lbs (1655 kg)
Skirt Material	Domestic Synthetic - Export Wood or Synthetic
Poly Floor	Yes





Water System	
Water Treatment System	Ultra Pure™
Plumbing Systems	4
Filters/Coverage	2 / 75 sq. ft.
Gate Valves	4
VCR Jet® - Air Adjustable/Directional	8
VCR Jet® - Rotator	3
VCR Jet® - Dual Rotator	4
VCR Jet® - Multi Port Spinner	1
VCR Jet® - Mini Rotator	9
VCR Jet® - Mini Directional	10
VCR Jet® - Euro Directional	0
VCR Jet® - Euro Rotator	0
VCR Jet® - Mini Directional in NFJ	8
Typhoon Jet	1
Ozone Jet	1
Heater Return Jet	1
Pump Returns	4
Diverter Valves	2
Floor Drains	1
Skimmer	8" Weir

Special Features	
Dynamic Massage Sequencer w/ control panel	No
NeckFlex® Jet Pillows	2
Headrest Pillows	1
Stereo system	Optional Poly-Planar
Water Feature	Optional with LFX package
Water Feature Volume control	Optional with LFX package
Cup Holders	2
Tactile Therapy	Foot & hand

	Domestic (60Hz)	Export (50Hz)
Pump Information		
Motor Size – Peak (Continuous) HP	4.0 (2.5) Hp	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	Two / Dual	Two / single
Circulation pump	1	1
Fountain pump	n/a	n/a
Electrical System		
Voltage	240	240
Amperage	50/40/30	1X16 / 2X16 / 1X32
Heater	FastFlo 2.7,4.0,5.5 kW	FastFlo 2.9 kW
Thermostat	Electronic	Electronic
Light	Multi color LED	Multi color LED
Control System	MSPA-MP-D17-NON LFX, MSPA-MP-D18 LFX	MSPA-MP-CE-D17-N/LFX, -D18 LFX
Upper Control (programmable)	M-Drive with Scrolling Message Center	M-Drive with Scrolling Message Center
Auxiliary Upper Control	Yes	Yes

Note: 1. Subject to change without notice.

Architectural Specification Diplomat

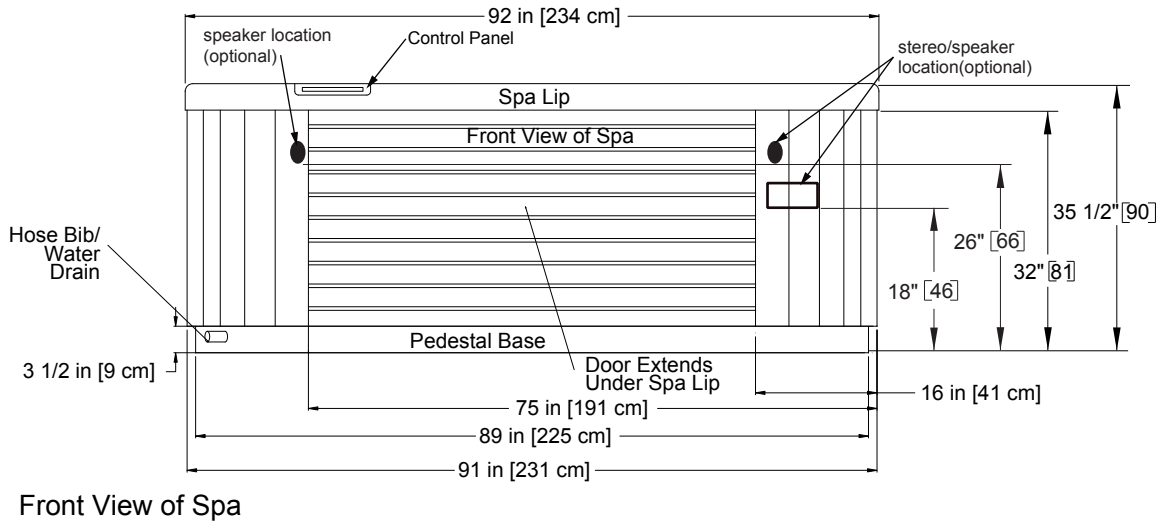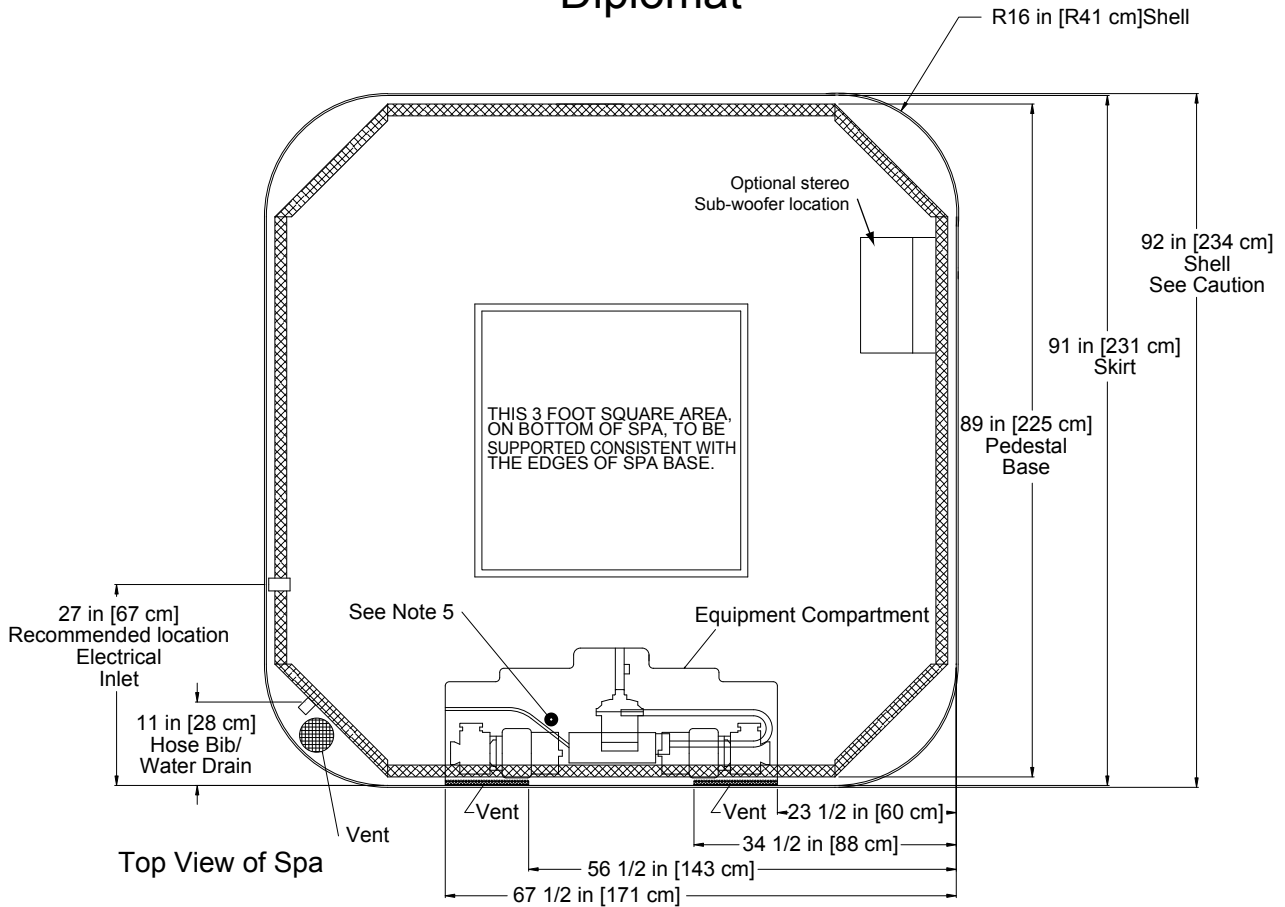

Note: 1. Subject to change without notice.

2. Engineering specs may differ slightly from brochure.
3. For E-Z lifter installation allow 18" (45.7cm) clearances on the backside of the spa.
4. Alternative cabinets may add significant weight. Ask your dealer for exact details
5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment(drain from the inside compartment out). Dimensions shown as inches and [centimeters] - XX" [cm]

Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.